

primus

High Spin Industrial Washer Extractor FS 120

FEATURES

- Freestanding, high spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Graphitronic® - new graphic display with almost unlimited possibilities as:
 - Communication interface enabling remote service
 - Multilingual microprocessor
 - Freely programmable
- Extra large door opening (Ø70 cm)
- Large drain valve (Ø126 mm)
- Easy access to all parts
- Standard liquid soap connections
- Frequency controlled motor
- PowerWash® perforated lifting ribs: more mechanical action, lower water consumption

OPTIONS

- Tilting forwards or forwards and backwards for easy loading and unloading
- Second drain valve (Ø126 mm) for water recycling
- Patented soap dispenser with 5 removable compartments
- Automatic door opening
- Linen chute for easy loading
- Liquid soap pumps
- Air operated water inlet
- Trace-Tech® traceability software and networking system




 **Graphitronic®**

 **TRACE-TECH®**

 **POWERWASH®**

TYPE		FS 120 (static version)	FS 120T (tilting version)
CAPACITY			
Drum volume	l	1186	
Capacity	kg	120	
	lbs	255	
Drum diameter	mm	Ø1280	
MOTOR			
Frequency controlled		standard	
DRUM SPEED			
Wash speed	rpm	32	
Spin speed	rpm	720	
G-Factor spin speed		371	
PROGRAMMER			
Graphitronic® microprocessor		standard	
CABINET			
Stainless steel AISI 304		standard	
DRUM			
Stainless steel AISI 304		standard	
HEATING			
Steam high pressure	bar	3-8	
	psi	44-116	
CONNECTION			
Electrical		3x380-480V 50/60Hz 3x200-240V 50/60Hz	
	kW	18,75	
Water inlet	inch	3x6/4"	
Steam inlet	inch	1"	
Compressed air inlet	inch	1/4"	
Drain	mm	126 (2nd drain optional)	
	inch	5"	
TILTING SYSTEM			
Tilting angle forward		-	option 15 °
Tilting angle backward		-	15 °
Number of turning points		-	2
Tilting drive medium		-	pneumatic
AUTOMATIC DOOR OPENING			optional
LOADING DEVICE		-	optional
DIMENSIONS HxWxD	mm	2150x2000x2080	
TRANSPORT DATA			
Gross weight			
Case packaging	kg	4150	
Net weight	kg	3940	
Volume (packed)	m³	11,1	
Case packaging HxWxD	mm	2250x2170x2285	
- = Not available			
Standard = Standard execution			

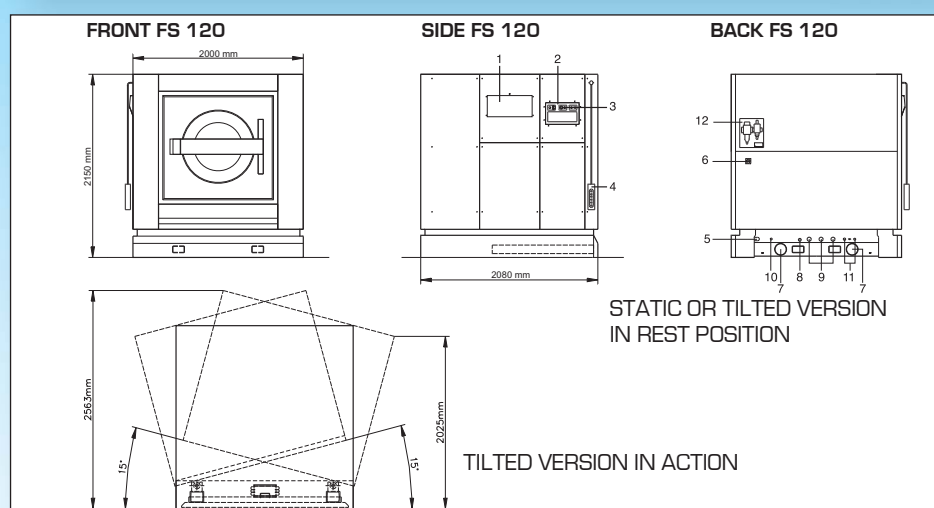

1. Soap hopper (optional)
2. Key board
3. Emergency stop
4. Hand remote control
5. Electrical connection
6. Main switch
7. Drain valves (2nd optional)
8. Steam connection
9. Water inlets (3rd optional)
10. Air supply
11. Liquid soap connections
12. Air control

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

primus

Quality **without**
compromise

