

STACK TUMBLE DRYERS

DX
RANGE

DX 13/13

DX 20/20

2x13kg

2x20kg




FEATURES

- Double capacity on the same footprint
- Easy to use timer
- Gas, Electrical and Steam heating (DX13/13)
- Gas heating (DX20/20)
- Large door opening for easy loading and unloading (DX 13/13 Ø 57cm, DX 20/20 Ø 68cm)
- Galvanized drum
- Axial airflow
- Large lint filter

OPTIONS


- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Full OPL microprocessor
- Residual moisture control Sensodry+® (only with Full OPL microprocessor):
 - lower energy and utility costs
 - lower linen replacement costs



DOUBLE CAPACITY




EASY OPERATION



SUITABLE FOR LAUNDROMATS

TYPE		DX13/13	DX20/20
CAPACITY			
Capacity	kg	2x13	2x20
Drum volume	l	2x301	2x421
Drum diameter	mm	Ø 762	Ø 838
AIRFLOW			
50 Hz	l/s	160	236
60 Hz	l/s	189	283
DRYING AVERAGE			
Gas heating	g/min	290	376
Electric heating	g/min	313	-
MOTOR			
Fan	kW	2x0,187	2x0,375
Drive	kW	2x0,187	2x0,375
GAS HEATING			
Energy	kW	42,8	51
Energy	kBTU/h	146	174
Electrical connection		1x200-240V 50/60Hz, 3x200-240V 50/60Hz 3x380-415V 50Hz, 3x380-415/440V 60Hz	1x200-240V 50/60Hz 3x380-415V 50 Hz
Gas connection (one manifold)	NPT	1/2"	1/2"
STEAM HEATING			
High pressure 6,9 bar	kW	32,5	-
	kBTU/h	111	-
Electrical connection		1x200-240V 50/60Hz, 3x200-240V 50/60Hz 3x380-415V 50Hz, 3x380-415/440V 60Hz	
Steam connection	NPT	3/4"	-
ELECTRICAL HEATING			
Energy	kW	21	-
Electrical connection		3x200-240V 50/60Hz, 3x380-415 50Hz, 3x380-415/440V 60Hz	
EXHAUST	Ø /mm	1x203	1x254
DIMENSIONS			
Size HxWxD	mm	1937x800x1086	2059x876x1235
Net weight	kg	247	305
TRANSPORT DATA			
Packed HxWxD	mm	2057x825x1194	2159x902x1372
Gross weight	kg	264	326

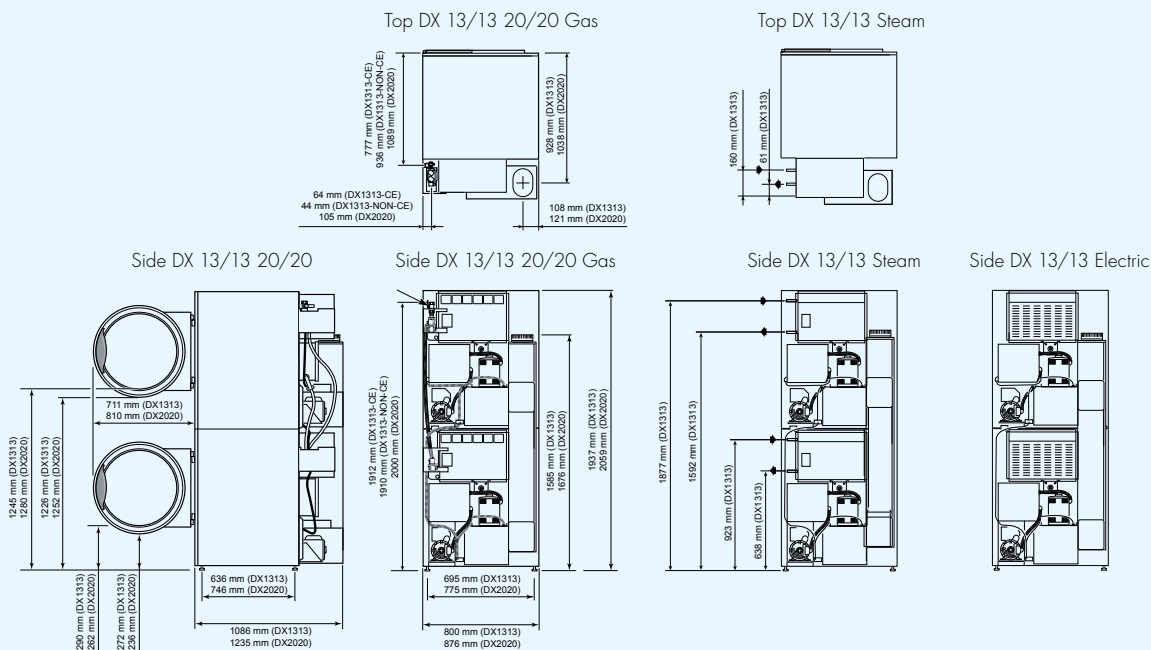

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

