

TUMBLE DRYERS

DX
RANGE

DX 55

55kg

DX 77

77kg

DX 90

90kg



FEATURES

- Full OPL microprocessor
- Gas, Steam heating, Electrical heating (DX55)
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Radial airflow
- Standard reversing drum
- Self-cleaning lint screen
- Preheating of intake air

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Residual moisture control Sensodry+®:
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING
CYCLES




LOW ENERGY
CONSUMPTION



LARGE DOOR
OPENING

TYPE		DX55 EL	DX55 GAS	DX55 STEAM (HIGH PRESSURE)	DX77 GAS	DX77 STEAM (HIGH PRESSURE)	DX90 GAS	DX90 STEAM (HIGH PRESSURE)
CAPACITY	kg		55		77		90	
DIMENSIONS DRUM								
Drum volume	l		1021		1408		1656	
Drum diameter	mm		Ø 1118		Ø 1289		Ø 1289	
AIR FLOW	l/s		755		1156		1156	
HEATING	kW	60	79	119	116	190	125	190
MOTOR								
Drum	kW		0.560		0.560		0.560	
Fan	kW		0.746		2.238		2.238	
CONNECTION								
Electrical	AC/Hz		3x200-240V 50/60Hz, 3x380-415V 50 Hz, 3x380-415/440V 60Hz				Others on request	
Gas inlet	inch	-	1	-	1	-	1	-
Steam inlet	inch	-	-	3/4	-	3/4	-	3/4
Air outlet	mm		254		305		305	
	inch		10		12		12	
DIMENSIONS								
Size HxWxD	mm		2177x1178x1725		2388x1349x1749		2388x1349x1939	
Net weight	kg	578	578	624	714	760	790	820
TRANSPORT DATA								
Packed HxWxD	mm		2286x1232x1829		2519x1473x1892		2515x1413x2019	
Gross weight	kg	607	607	656	756	806	855	855

The data concerning dimensions of machines include all extended parts

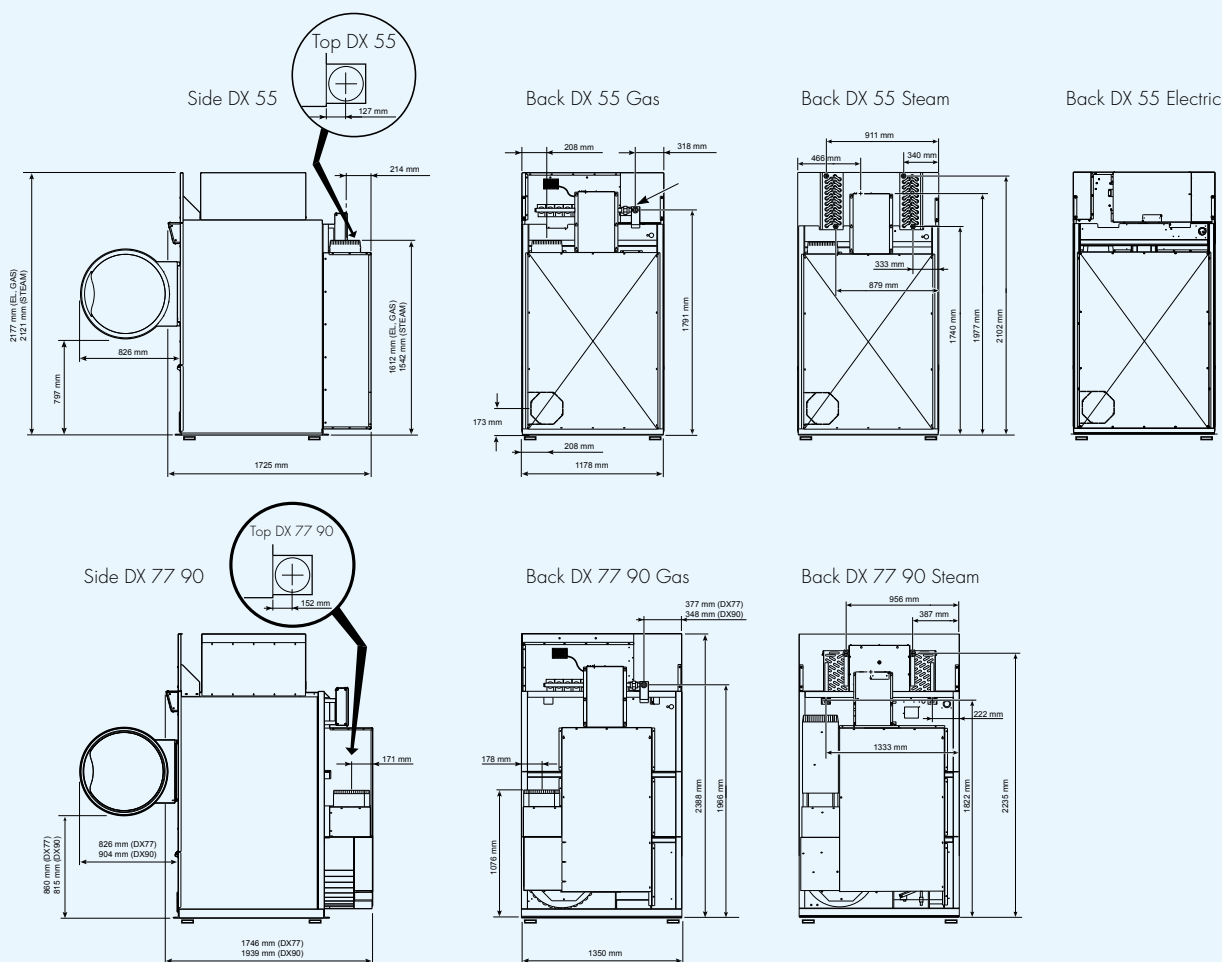

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

