

# INDUSTRIAL CYLINDER HEATED DRYING IRONER


I  
RANGE

I33

320MM



HIGH OUTPUT



COMPACT  
DESIGN



ENERGY  
EFFICIENT

## FEATURES

- Large surface contact with linen over an angle of 300°
- Highly polished steel, thin cylinder
  - Reasonable price
  - Rapid response to temperature
  - Excellent thermal conductivity
- Emergency button and Main switch in one
- Finger protection bar for even more safety
- Durable Meta Aramid ironing belts
- Extra heavy press roller for high-quality ironing
- Patented direct drive – maintenance-free – system
- Patented central suction system with maintenance-free operation
- Automatic cool down
- Easy to operate microprocessor MCX
- Frequency controlled motor
- Indication of ironing speed and temperature


- Space-saving installation against the wall is possible: front return
- Exhaust outlet at back of the machine
- Electric or gas heating
- Metal fibre premix burner (for Gas only)
- Ergonomic design
- Overheating check system (OCS) with 3 temperature sensors
- Adjustable exhaust flap
- Exhaust output on the right

## OPTIONS

- Coin operated version
- Central payment system operated version (CPS)
- Chrome-plated cylinder for better thermal conduction and ironing quality
- Pedal of insert table stop system
- Fixation set for mounting to the floor

TYPE		I33-160 E	I33-200 E	I33-160 G	I33-200 G
ROLLER DIAMETER	mm	320	320	320	320
USEFUL ROLLER LENGTH	mm	1664	2080	1664	2080
CAPACITY*	kg/h	62	70	58	72
SPEED	m/min	1-6			
<b>HEATING</b>					
Electric	kW	24.3	27.9		
Gas**	kW			25	30
<b>MOTORS</b>					
Roller motor	kW	0,18	0,18	0,18	0,18
Fan motor	kW		0,095 (50 Hz) / 0,125 (60 Hz)		
Total installed power	kW	24,7	28,3	0,5	0,5
Max. temperature	°C	180			
Consumption of electricity	kWh	21,4	27,3	0,5	0,5
Consumption of gas	m <sup>3</sup> /h			2,62	3,13
Gas types				G20, G25, G30, G31, G110	
Max. gas pressure	mbar			50	
Noise level	dB (A)	< 57			
Ingress protection		IP42			
<b>ELECTRIC CONNECTION</b>					
			380-415V 3AC+N 50/60 Hz 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz		
			440V-480 3AC 60 Hz (1)	440V-480 3AC 60 Hz 208-240V 1AC 50/60 Hz	
<b>DIMENSIONS</b>					
H×W×D	mm	1110x2084x755	1110x2500x755	1110x2084x755	1110x2500x755
Netto weight	kg	435	490	410	465
<b>TRANSPORT DATA</b>					
Packed H×W×D	mm	1260x2190x800	1260x2610x800	1260x2190x800	1260x2610x800
Brutto weight	kg	485	560	465	540

\* According to ISO 9398-1, \*\* For the G20, 20 mbar, (1) max. 456 V

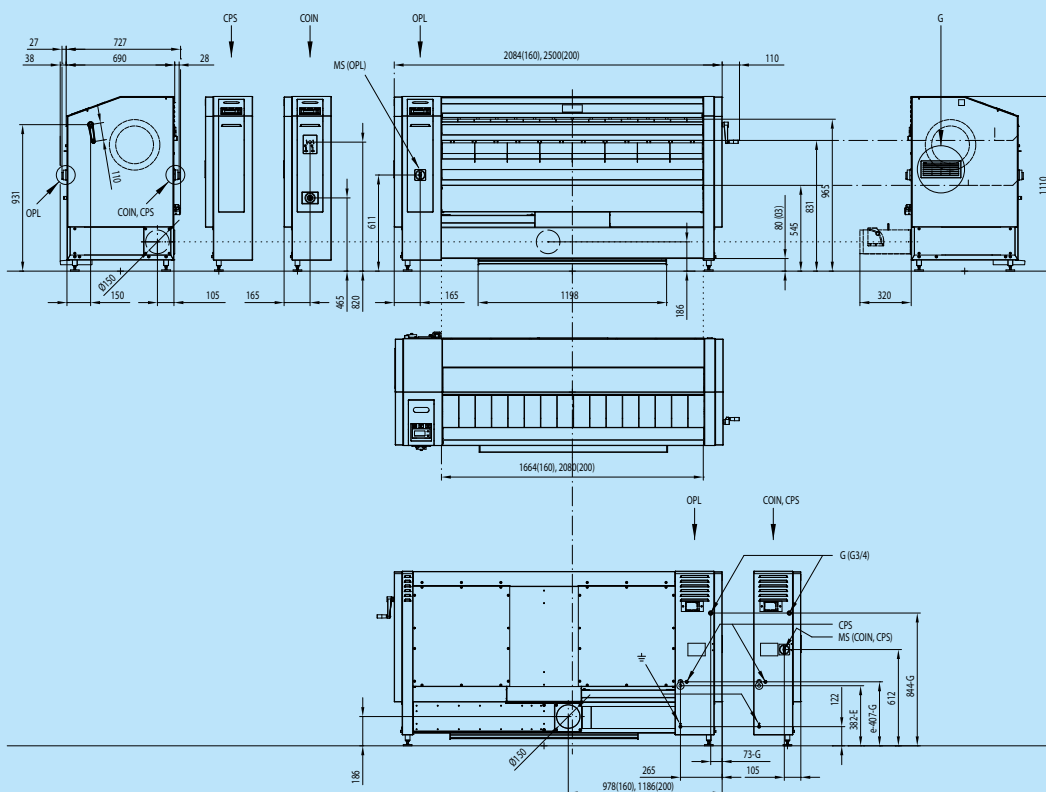

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)



Primus by Alliance Laundry Systems

12-2017