

# primus

## Industrial Dryers D 55, D 77




### FEATURES

- Easy-to-use electronic programmer
- Dryness level setting is a standard feature on the electronic programmer
- Gas or steam heating
- Large door opening for easy loading and unloading (Ø62cm)
- Standard reversing drum
- Self-cleaning lint screen
- Preheating of intake air

### OPTIONS

- Stainless steel drum

TYPE		D 55 GAS	D 55 STEAM (HIGH PRESSURE)	D 77 GAS	D 77 STEAM (HIGH PRESSURE)
<b>CAPACITY</b>	kg	55		77	
<b>DIMENSIONS DRUM</b>					
Drum volume	m <sup>3</sup>	1,025		1,408	
Drum	mm	Ø1118x1041		Ø1289x1080	
<b>AIR FLOW</b>	l/s	755		1156	
<b>HEATING</b>	kW	55		73	
<b>MOTOR</b>					
Drum	kW	0,552		0,552	
Fan	kW	0,736		2,208	
<b>CONNECTION</b>					
Electrical 380-400V	AC/Hz	3+N/50 Others on request		3+N/50 Others on request	
Gas inlet	inch	3/4	-	1	-
Steam inlet	inch	-	3/4	-	1 1/4
Air outlet	mm	254		300	
	inch	10		12	
<b>DIMENSIONS</b>					
HxWxD unpacked	mm	2177x1178x1725	2121x1178x1725	2388x1349x1749	2388x1349x1749
HxWxD packed	mm	2300x1300x1820	2300x1300x1820	2520x1480x1910	2520x1480x1910
<b>WEIGHT</b>					
Net	kg	580	625	716	761
Gross	kg	655	700	871	836

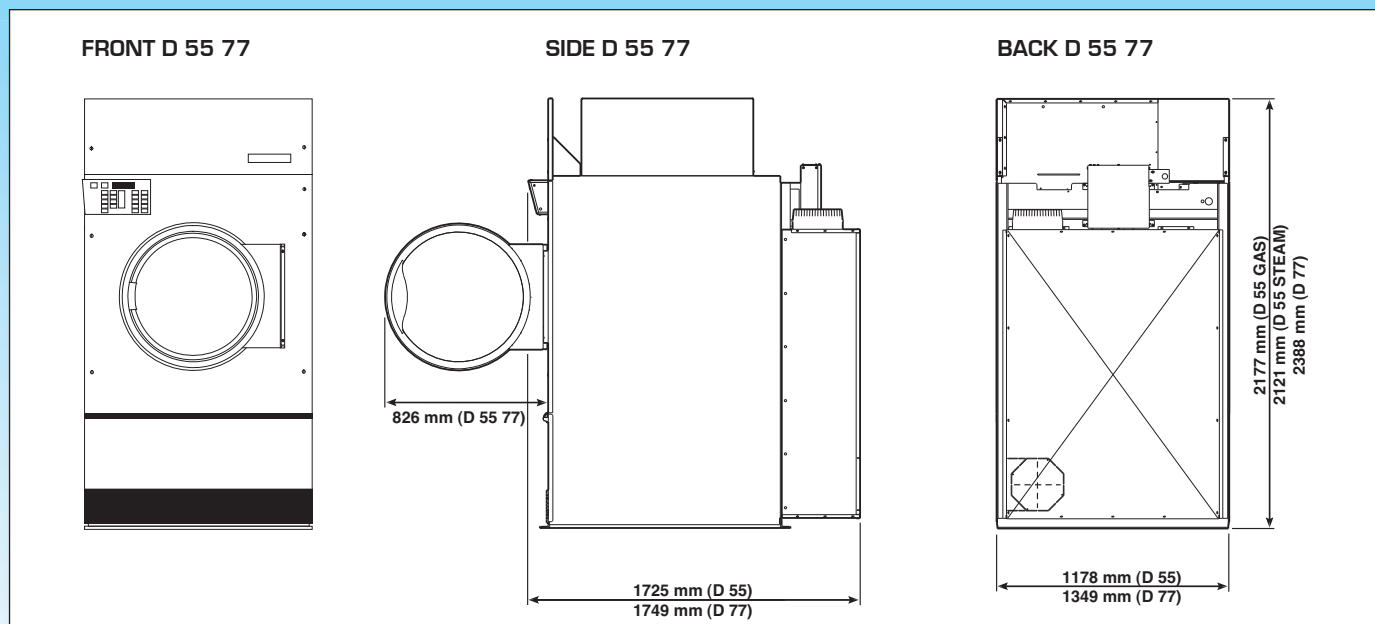

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

primus

Quality **without**  
compromise

