

# primus

## Industrial Dryers D 25, D 35




### FEATURES

- Easy to use electronic programmer
- Galvanized drum
- Standard dryness level setting on the electronic programmer
- New larger door opening for easy loading and unloading
- Large lint filter
- Gas, electric and steam heating

### OPTIONS

- Electronic display
- Reversing drum
- Stainless steel drum
- Stainless steel front
- Coin timer

TYPE		D 25 GAS	D 25 ELECTRICAL	D 25 STEAM (HIGH PRESSURE)	D 35 GAS	D 35 ELECTRICAL	D 35 STEAM (HIGH PRESSURE)
CAPACITY	kg	23			34		
DIMENSIONS DRUM							
Drum volume	m³	0,5283			0,634		
Drum diameter	mm	Ø939			Ø937		
AIR FLOW	l/s	354			434	354	
HEATING	kW	30			30		
MOTOR							
Drum	kW	0,368			0,552		
CONNECTION							
Electrical 220-240V	AC/Hz	1/50	3/50	1/50	1/50	3/50	1/50
Electrical 380-400V	AC/Hz		3/50			3/50	
		Others on request		Others on request	Others on request	Others on request	Others on request
Gas inlet	inch	1/2	-	-	1/2	-	-
Steam inlet	inch	-	-	3/4	-	-	3/4
Air outlet	mm		203			203	
	inch		8			8	
DIMENSIONS							
HxWxD unpacked	mm	1946x981x1194		2080x981x1194	1946x981x1346		2026x981x1346
HxWxD packed	mm	2065x1060x1320		2165x1060x1320	2050x1060x1440		2150x1060x1440
WEIGHT							
Net	kg	257	264	265	292	275	305
Gross	kg	278	286	287	330	313	337

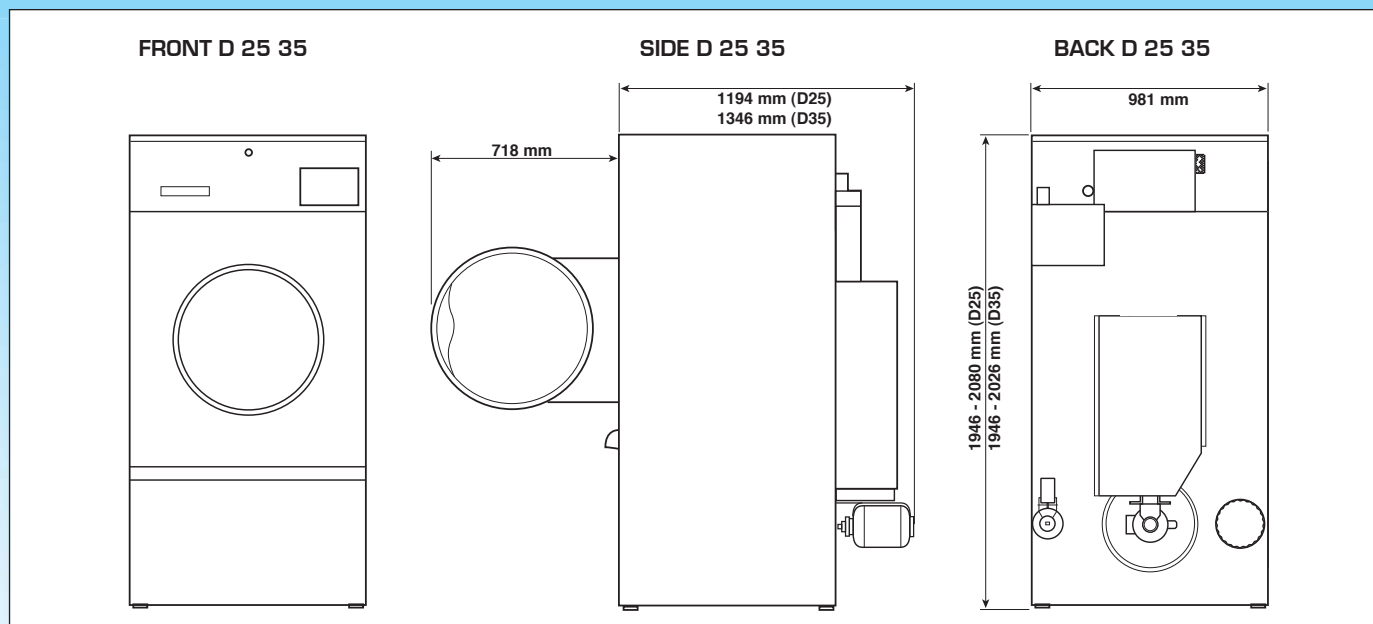

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

primus

Quality **without**  
compromise

